




Fire Alarm Equipment

TFS01 -- T-tap Flow Switch

- Service Pressure: Up to 450 PSI (3.1 MPa)
- Flow Sensitivity Range for Signal: 4 ~ 10GPM (15.0 ~ 37.5 L/min)
- Maximum Surge: 18 FPS (5.5 m/s)
- Contact Ratings: Two sets of SPDT (Form C)
10.1 Amps at 125/250 VAC
2.0 Amps at 24 VDC
- Operating Temperature Range: 40 °F to 120 °F (4.5 °C to 49 °C)
- Enclosure Rating: NEMA 4- suitable for indoor/outdoor use
- Conduit Entrances: Two openings for 1/2" conduit
One open, one knock-out type
- Compatible Pipe: Fits 1", 1¼", 1½" and 2" ferrous and brass threaded tees
- Service Use: Automatic Sprinkler: NFPA-13
One or Two Family Dwelling: NFPA-13D
Residential Occupancies up to 4 stories: NFPA-13R
- National Fire Alarm Code: NFPA-72
- Cover Material: Aluminum Die-casting. Alternative Material Plastic

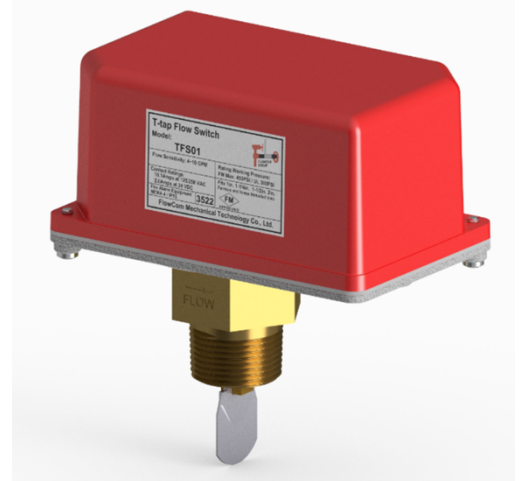

Typical Electrical Connections and Time Delay Adjustment

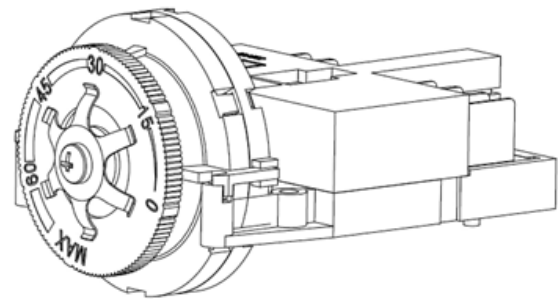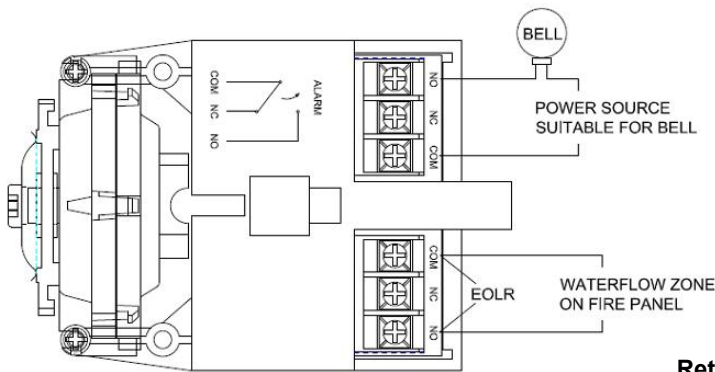

Retard device can be set from "0" to "MAX" position, delay time can be set from 0 ~ 90 secs

Dimensions

Pipe Size		W		H		H1		D (Depth)	
in.	DN	in.	mm	in.	mm	in.	mm	in.	mm
1	25	3.75	95.3	6.64	168.7	1.48	37.5	2.12	54
1¼	32	3.75	95.3	6.98	177.3	1.48	37.5	2.46	62.5
1½	40	3.75	95.3	7.23	183.7	1.48	37.5	2.71	69
2	50	3.75	95.3	7.75	196.9	1.48	37.5	3.22	82

